DAWN / DE-STA-CO SPECIAL CLAMPS

Recommended accessories
(order separately)
adjustment spindle M8
part no. 225208-M

Series 317



Model 317-U

Model 317-S

Model 325



The model 325 can also be used for stationary purposes due to 2 fastening bores Ø 6.7mm. Field of application: eg locking of containers, shutters etc.

Model 345 - G



The model 345-G has a large adjustable clamping range and quick release lever. This quick release lever allows for easy manual opening of the plier clamp. For stationary applications, the solid square foot can be welded on a clamping fixture.

Model	317-U	317-S	325	345-G
Model in stainless steel			325-SS	
Holding Force daN	170	190	360	360
Opening Angle	185	185	90	84
Weight kgs	0.34	0.34	0.45	1.4

317 - U

325

DAWN / DE-STA-CO ACCESSORIES

Adjustment spindle with vulcanised neoprene thrust pad (80⁰ shore) & 2 hexagonal nuts



THREAD G	L	L1	ØD	PART NO.
M4	18.5	16	8	205208-M
M5	29	25	10	305208-M
M5	34	30	10	213208-M
M8	44	35	19	307208-M

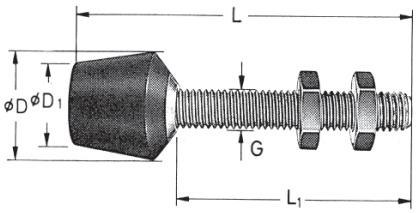

THREAD G	L	L1	ØD	ØD1	PART NO.
M6	44	30	16	12	202208-M
M6	54	40	16	12	215208-M
M8	53	35	21	14	225208-M
M8	78	60	21	14	507208-M
M10	79	55	26	20	240208-M
M10	140	115	26	20	235208-M
M12	97	68	30	24	247208-M

Adjustment spindle with swivel foot & 2 hexagonal nuts

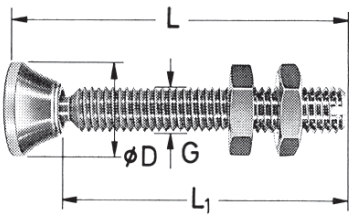

THREAD G	L	L1	ØD	PART NO.
M6	62	54	12	207206-M
M8	73	62.5	16	507206-M
M10	84	71	20	210206-M
M12	120	105	25	250206-M

Adjustment spindle with hexagonal head & 2 hexagonal nuts

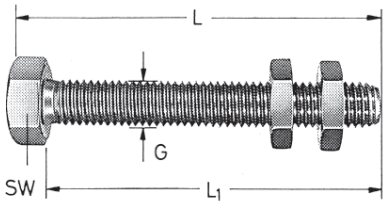

THREAD G	L	L1	SW	PART NO.
M6	49.5	45	10	205203-M
M6	79.5	75	10	202203-M
M8	70.5	65	13	207203-M
M10	77	70	17	210203-M
M10	107	100	17	240203-M
M10	127	120	17	527203-M
M12	83	75	19	220203-M
M16	110	100	24	250203-M
M16	130	120	24	267203-M