




DAWN / DE-STA-CO STRAIGHT LINE CLAMPS - PUSH & PULL ACTIONS

The straight line toggle clamps have a large holding capacity for its size. It is well adapted for use in confined areas because of its small package size and low height. The plunger can be locked in both the extended (open) or retracted (closed) clamping positions and can serve as latch clamps. The plunger comes with a threaded hole. Comes complete with oil resistant ergonomic handle. Additional mounting flanges can be supplied for models 602, 604 and 624 models. Stainless steel models available in 602-SS, 604-SS, 624-SS




Model	601-M	602-M	603-M	604-MM	605-M	607-M	624-M	606-M	609-M	610-M	620-M	630-M	640-M	650-M
Model s/steel	601-SS	602-SS		604-SS			624-SS							
Holding Force daN	40	90	270	130	130	360	300	200	130	270	270	1100	3000	4500
Stroke mm	16	19	32	38	32	42	67	38	32	41	28	50	101	76
Weight kgs	0.04	0.11	0.32	0.28	0.31	0.63	0.75	0.31	0.4	0.68	0.68	0.9	3.2	2.5

Model 601-M



In stainless steel Model 601-SS




Model 605-M

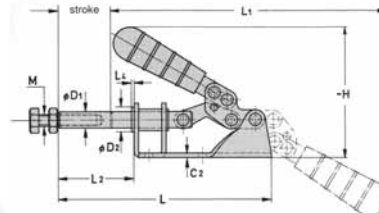

Model No.	A	A1	A3	B	B1	C1	C2	D	D1	D2	~H	H1	~L	~L1	L2	L3	L4	M
601-M	16	34	8	16	27	12.6	2.2	4.4	6.4	11	31	20	67	84	32.5	12	-	M4
605-M	35	87	7	41.3	55.5	24.5	3.2	5.5	11	19.5	90	37.5	139	195	49	25	2.5	M8

Model 603-M




model 603-M

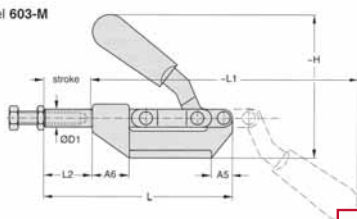

Model 603-M

Models 607 M, 630 M, 640 M

models 607-M, 607-SQM, 630-M and 640-M

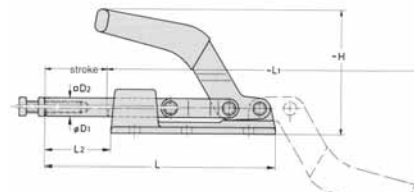

Special version available on request

Model 607-SQM with square push rod for accurate positioning. Same dimensions as model 607-M.



Model 607-M



Model 630-M



Model 640-M

Model No.	A	A1	A2	A3	~A5	A6	B	B1	C1	C2	φD	φD1	D2	L	~L1	L2	L3	~H	M
603-M	36.6	51	-	7	10	24.5	33.2	48	24.5	5	5.5	11	-	121	167	32.5	25.4	88	M 8
607-M	35	107	76.5	15.5	-	-	41.5	56	17.5	5	7.2	12.7	-	154	212	47	25	85	M 8
607-SQM	35	107	76.5	15.5	-	-	41.5	56	17.5	5	7.2	-	12.7	154	212	47	25	85	M 8
630-M	35	128	76	13	-	-	41	57	21	5	8.7	16	-	180	234	52	32	75	M 10
640-M	90.5	216	181	17.5	-	-	54	76	32	9.5	10.3	22	-	321	393	105	50	110	M 12

