


Other Winches in the "DAWN" Range

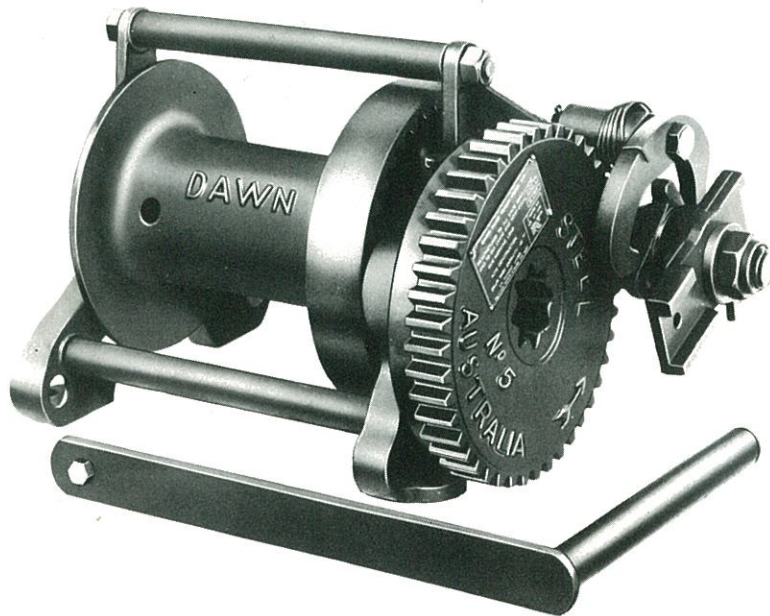

"DAWN", No 5 WINCH

TECHNICAL DATA

DAWN, No. 2 CODE 9192 CLASS 2

★ Capacity – Safe working load	25 Cwts.	1270 Kg.
Diameter of Drum	4 Ins.	102 mm.
Length of Drum	8 Ins.	204 mm.
☆ Speed Ratio – High	4 to 1	
– Low	22 to 1	
Drum Wire Capacity	120 Ft.	36.5 M.
Rope Diameter	3/8 Ins.	9.5 mm.
Rope Construction	6/22WF – IWRC	
Weight	76 Lbs.	34 Kg.
Approx. Dimensions Excluding Handle	15" x 13" x 11"	
Effort required on Handle to Raise Full Load	381 mm. x 330 mm. x 279 mm.	37 Lbs. 17 Kg.

TECHNICAL DATA

DAWN, No. 5 CODE 9193 CLASS 2


★ Capacity – Safe working load	55 Cwts.	2794 Kg.
Diameter of Drum	5-5/8 Ins.	143 mm.
Length of Drum	10 Ins.	254 mm.
☆ Speed Ratio – High	4.3 to 1	
– Low	24 to 1	
Drum Wire Capacity	250 Ft.	76.2 M.
Rope Diameter	9/16 Ins.	14.2 mm.
Rope Construction	6/26WF – IWRC	
Weight	134 Lbs.	61 Kg.
Approx. Dimensions Excluding Handle	20" x 17" x 15"	
Effort required on Handle to Raise Full Load	508 mm. x 432 mm. x 381 mm.	39 Lbs. 18 Kg.

☆ For use of High Speed Ratio, additional Pinion and Extension Shaft is required.

TECHNICAL DATA


★ Capacity – Safe working load	10 Cwts.	508 Kg.
Diameter of Drum	3 1/2 Ins.	89 mm.
Length of Drum	6 Ins.	153 mm.
Speed Ratio – High	Direct onto Drum Shaft	
– Low	4.2 to 1	
Drum Wire Capacity	80 Ft.	24.4 M.
Rope Diameter	5/16 Ins.	7.9 mm.
Rope Construction	6/25 FW IWRC	
	6/24/B100 – IWRC	
Weight	40 Lbs.	18 Kg.
Approx. Dimensions Excluding Handle	12" x 9" x 9"	
Effort required on Handle to Raise Full Load	305 mm. x 229 mm. x 229 mm.	40 Lbs. 18 Kg.

★ Above capacities are governed by a single fall of rope, however capacity can be increased by different pulley block arrangements.

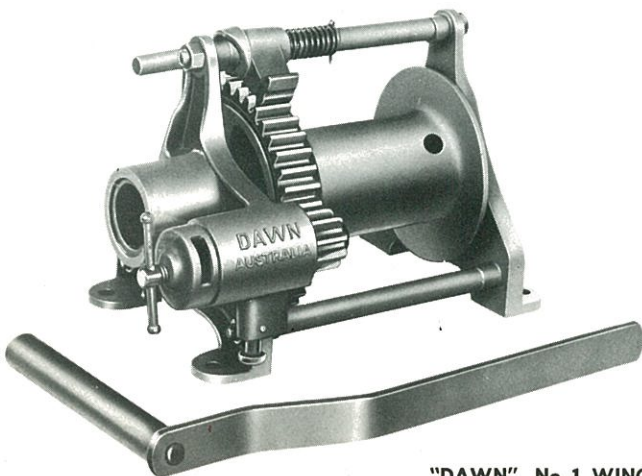

"DAWN", No 1 WINCH


Introducing the Mighty Midget

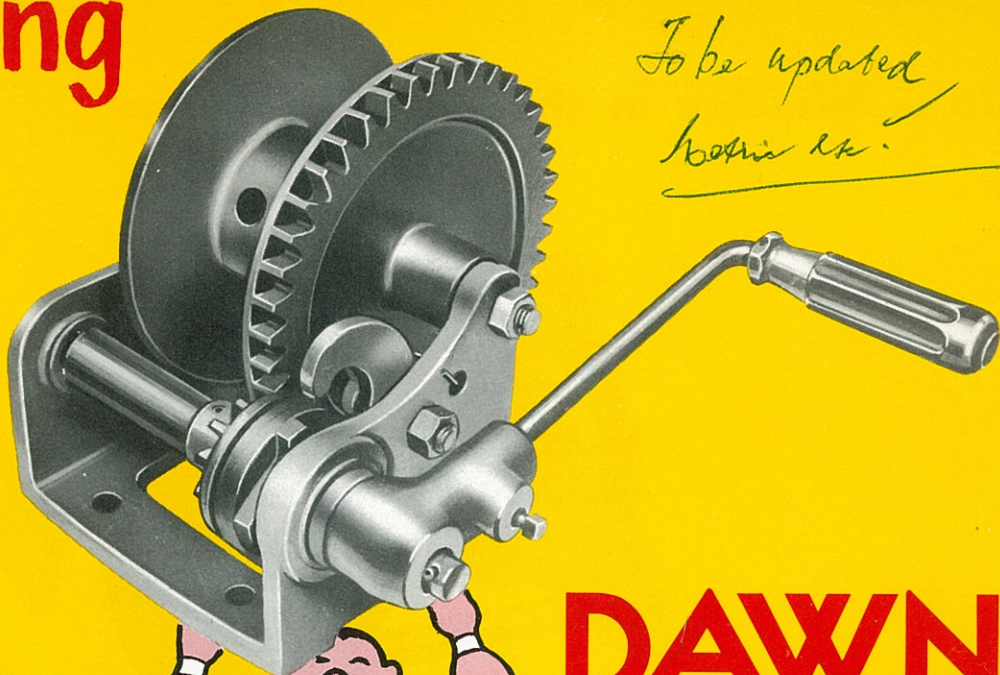

*To be updated
later!*



DAWN No. 150 HAND WINCH

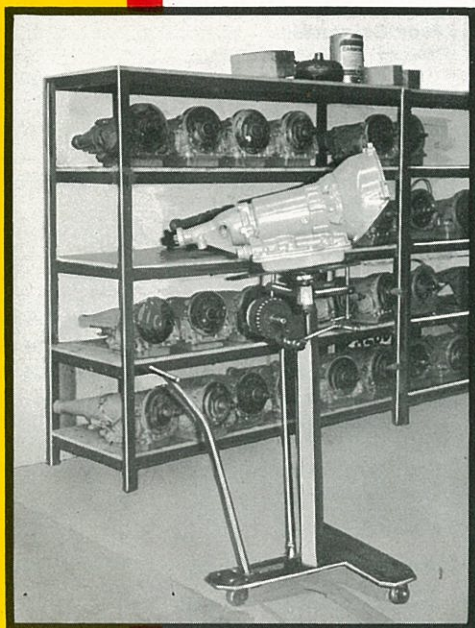

Compliments of
General Automatics
Moonee Ponds, Vic.

WIND UP — WIND DOWN

The major feature of this winch is the ability to lower the load without the necessity to disengage any mechanical device.

The operator simply rotates the handle in an anti-clockwise direction to lower, and the load will lock the braking mechanism automatically at all stages of the operation.

- D.L.I. Approval to rating of 150 kg.
- Drum Capacity 20 m x 3 mm wire rope.
- All castings of high strength ductile iron.

Compliments of Brian Lane, Eng.
Stepney, S.A.

DAWN TOOLS AND VICES
DIVISION OF SIDDNS PTY. LTD.
1 NORRIS STREET,
NTH. COBURG 3058

